

FLEXSERIES

PART NUM: SA-FC-BUF-FLSM


FIFO LIFO MAGAZINE BUFFER

FIFO/LIFO Single Magazine


FIFO-LIFO Buffer single magazine, PCBs are stored on internal standard magazine.

Programmable Pitch. This module can be used as G-NG PCB separation or as unloader/loader. Fast and easy access for magazine exchange. Up to 50 position.

Imagery for illustration purposes only. Please consult your local Seica Automation distributor for more information.

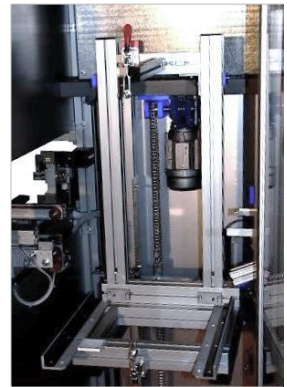

Layout Module

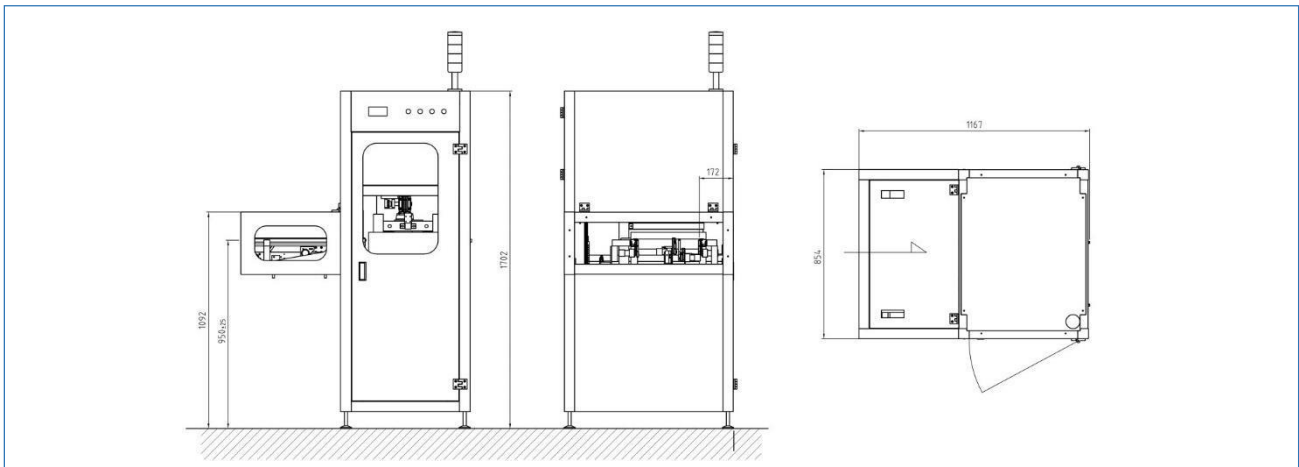

FLEX SERIES GENERAL FEATURES

TRANSPORT	
Height:	950 mm +/- 25 mm
Width:	Min. 85 mm – Max 390 mm
PCB edge space:	Min. 3 mm
Transfer direction:	Left to right
Operating side:	Front of the machine
Fixed Rail:	Front of the machine
Interface:	SMEMA standard extended SMEMA Optional Fuji, Panasonic, Sanyo, Siemens, SMPI, Special
SMEMA cable length:	3 m

PANEL DIMENSION	
Length:	Min. 80 mm – Max 510 mm
Width:	Min. 100 mm – Max 390 mm
Optional width:	Up to 460 mm on request
Thickness:	From 0.8 mm to 4.0 mm
Component clearance:	Top: 50 mm (80 mm on request) - Bottom: 30 mm (80 mm on request)
PCB max weight:	2 Kg
Max rack dimension	535 x 460 x 570 mm (LxWxH)

VARIOUS:

- CE safety compliant
- PLC microprocessor driven system
- Mechanical keyboard or LCD display with keyboard operation
- Automatic Width Adjust as option
- Single piece aluminium rails, proprietary design

POWER SUPPLY:

230V 50Hz 1+N+T or

CURRENT:

2 Ampere

AIR SUPPLY:

0,6 Mpa

WEIGHT:

180 Kg

DIMENSION LxWxH:

1.167x854x1.702 mm

COLOR:

RAL 7035

FRAME:

Aluminium profiles

All modules are ESD compliant and CE marked, each module has an independent control system. Technical specification may change without any advanced notice.

